



COOK & HOLD CHT082K

Static low
 temperature oven

CONSTRUCTION FEATURES

- Tightness chamber with radiuses corners
- Rubber bumpers
- Total thermic insulation with rock or glass wool
- Silicone rubber door gasket resistant to heat and aging
- Removable side tray racks for easy cleaning
- Static heating provided by low consumption wire heating element DeliWarm® that coils up all the chamber
- Ergonomic and fully built-in door handle with magnetic closure
- Mounted on four 125 mm diameter castors, two of which with brake
- Ergonomic back handle for pushing and guiding
- Easy access to facilitate maintenance and repair

FUNCTIONAL FEATURES

- Capacitive control panel with temperature, probe, time, holding, and program management settings
- Operating temperature 30°-120°C
- Adjustable humidity vents on the door
- Chamber with safety thermostat
- Manual keyboard lock
- End of cycle buzzer

STANDARD SUPPLY

- Removable GN 2/1 tray racks
- Internal core probe

OPTIONS & ACCESSORIES

- Set of adjustable feet
- Grids
- Trays
- Reversible door
- UK plug
- Smoker
- WiFi

MODULINESRL

moduline

TECHNICAL INSTALLATION DIAGRAM




Electricity supply
cable inlet



Vent for excess
humidity



Important - Drawing and
dimensions refer to the
standard version.
They may change with
the addition of
accessories
or options.

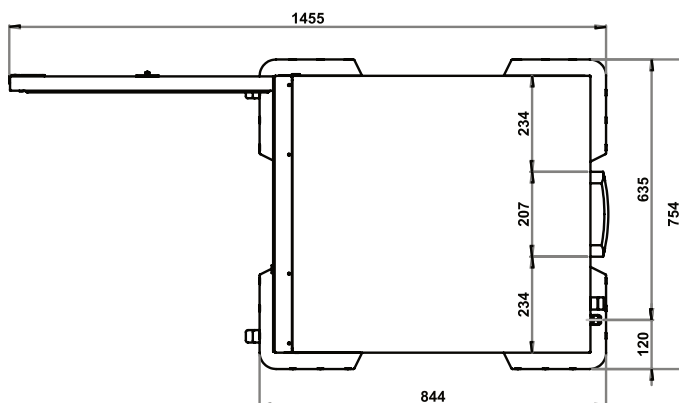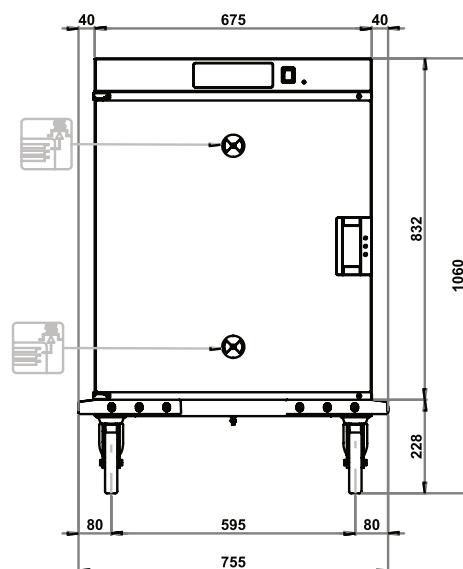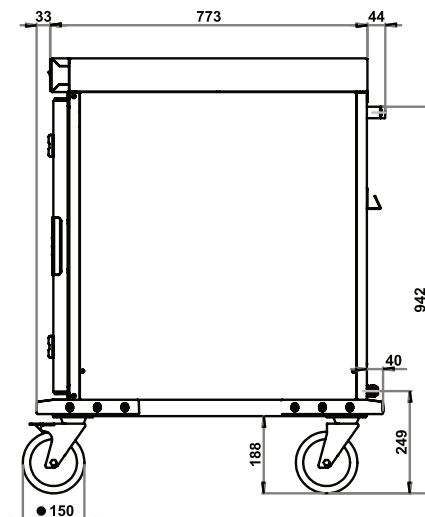

Overall dimensions
(W x D x H) - mm

754 x 844 x 1060 h

**Trays capacity -
distance [mm]**

8 x GN 2/1 - (75)
16 x GN 1/1 - (75)

Tray max. height
GN 2/1 [mm]

8 x 65 (h)
3 x 150 (h)
2 x 200 (h) + 2 x 65 (h)

Tray max. height
GN 1/1 [mm]

16 x 65 (h)
6 x 150 (h)
4 x 200 (h) + 4 x 65 (h)

Power supply

AC 220-240V 50/60Hz

Total input
[kW]

1,5 (230V)

Amps.
[A]

6,6 (230V)

**Working
temperature [°C]**

30 ÷ 120

**Product max
capacity [Kg]**

40

Net weight
[Kg]

62



- A Chamber Temperature
- B Cooking time or by Probe
- C Holding Temperature or Holding by probe
- D Smoking (optional)
- E Programs (Save or Recall)
- F Increase value
- G Start / Stop
- H Decrease value
- I Info Display
- On/Off switch beside the board

MODULINESRL