



moduline

item # .....  
model # .....  
project # .....  
sis # .....  
aia # .....



## RRFF20E

Floor regenerating  
cabinet (+3°C→+65°C)

### CONSTRUCTION FEATURES

- Tightness chamber with radiused corners
- Internal AISI 304 18/10 stainless steel bumpers for trolley's introduction
- Total thermic insulation with rock or glass wool
- Long lasting front seals made up of food grade of high heat resistance
- Ventilated heating provided by high efficiency protected heating elements
- Door fitted with three point locking system
- Easy access to facilitate maintenance and repair

### FUNCTIONAL FEATURES

- Electronic control panel of temperature, time and humidity with LCD touch-screen
- End-of-cycle buzzer
- Simplified, user-friendly control
- Automatic control of the humidity's percentage in the chamber, Climachef system
- Operating temperature: 30°C - 160°C
- Automatic humidity vent
- Chamber can accommodate different sized plate or tray rack transport trolleys
- Chamber with safety thermostat
- Delayed start timer
- Intelligent temperature decrease in the cavity at the end of the regenerating cycle allows a perfect warm holding

### STANDARD SUPPLY

- Climachef

### OPTIONS & ACCESSORIES

- Core probe with the possibility to register 30 different temperatures and save them in the HACCP report (available only with USB port device)
- Concealed water storage tank
- USB port saving device HACCP
- GN pans cart
- Plates cart
- Cart thermal cover
- Glass door and lighting
- Multipoint core probe
- Speedgrade fan speed reduction system
- External hand shower

**MODULINESRL**

Via dell'Industria 11, Z.I. San Giacomo di Veglia 31029 Vittorio Veneto (TV) - ITALY  
tel. +39 0438 5063 - fax +39 0438 912 323 - info@moduline.it - www.moduline.it



# moduline

Overall dimensions  
(W x D x H) - mm

1150 x 830 x 1950

Oven interior  
(W x D x H) - mm

780 x 695 x 1860

Trays capacity

20 x GN 1/1

Plates capacity  
Plates Ø 230-310

80

Power kW

12,5

Power supply

3N AC 400V 50Hz

Rated voltage  
[Vac]

3N - 400V

Total input [kW]

12,5

Amps. [A]


18

Connecting wire  
min. section (type  
H07 RN-F) [mm<sup>2</sup>]

5 x 2,5

Water pressure  
[kPa]

150 ÷ 500

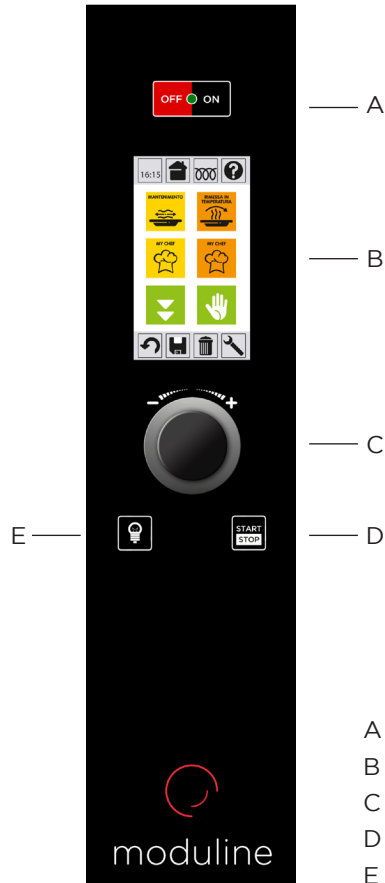

- A ON/OFF switch
- B Display
- C Setting knob and select "Enter"
- D START/STOP button
- E Chamber light button

**MODULINESRL**

Via dell'Industria 11, Z.I. San Giacomo di Veglia 31029 Vittorio Veneto (TV) - ITALY  
tel. +39 0438 5063 - fax +39 0438 912 323 - info@moduline.it - www.moduline.it