


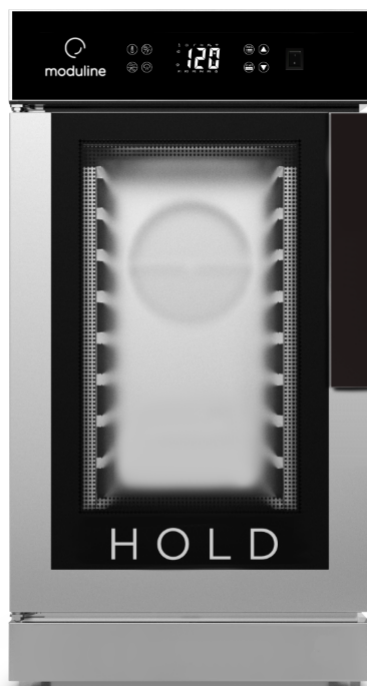

item #
 model #
 project #
 sis #
 aia #

HOLD HHK110K Multifunction Holding system

CONSTRUCTION FEATURES

- Tightness chamber with radiused corners
- Total thermic insulation with rock or glass wool
- Long lasting front seals made up of food grade of high heat resistance
- Internal drain for easy cleaning
- Ventilated heating provided by high efficiency protected heating elements
- Magnetic Door
- Adjustable feet
- Easy access to facilitate maintenance and repair
- Condensation drip tray under the door and connected to the oven drainage system.

FUNCTIONAL FEATURES

- Capacitive black mask digital control panel
- Simplified, user-friendly controls
- Automatic fan lock when opening the door
- Holding or Regeneration functions
- End-of-cycle buzzer
- Chamber with safety thermostat
- Operating temperature 30°C ÷ 120°C
- Possibility to save up to 5 programs
- Core probe
- Chamber preheating or cooling
- Double-glass door with LED lights, openable inner glass
- ClimaChef system able for automatic humidity control
- Automatic holding function for automatic hot holding management
- Removable GN1/1 tray-holder rack
- Manual control panel lock
- Holding with intermittent ventilation cycles

OPTIONS & ACCESSORIES

- ☐ Front water supply drawer kit with rear drain collection
- ☐ Stacking kit
- ☐ Grids
- ☐ Trays
- ☐ Sound silencer
- ☐ Air condensation hood
- ☐ 600x400 tray-holder rack
- ☐ External hand shower
- ☐ External water softener
- ☐ WiFi

MODULINE-

Via dell'Industria 11, Z.I. San Giacomo di Veglia 31029 Vittorio Veneto (TV) - ITALY
 tel. +39 0438 5063 - fax +39 0438 912 323 - info@moduline.it - www.moduline.it

TECHNICAL INSTALLATION DIA- GRAM

Electricity supply
cable inlet



Safety vent
humidity



Chamber drain




Softened
water inlet



Adjustable vent for
excess humidity



Important - Drawing and
dimensions refer to the
standard version.
They may change with
the addition of
accessories or options.

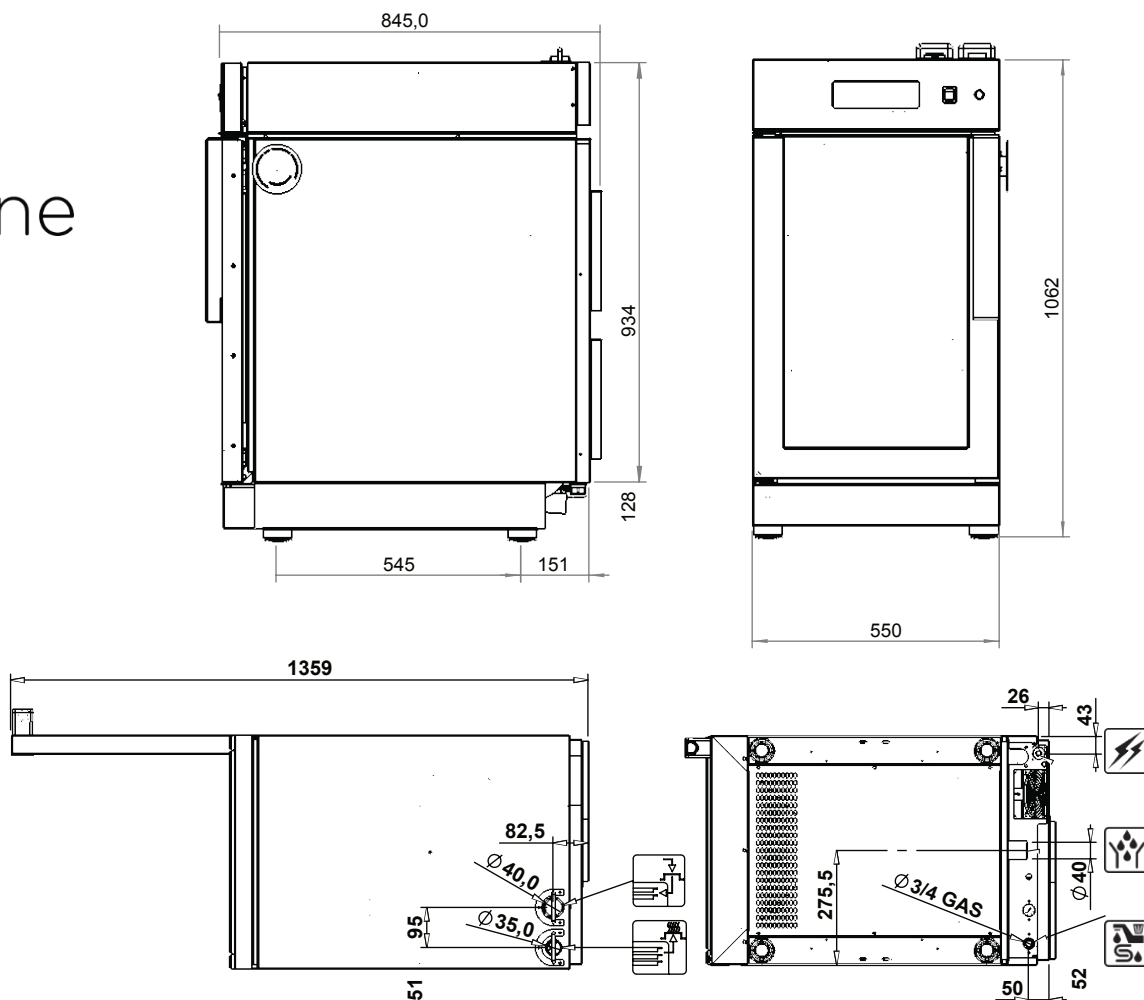

Overall dimensions
(W x D x H) - mm

550 x 845 x 1062 h

Trays capacity

10 x GN 1/1
o 600x400

Plates capacity

20 Ø 200-260
10 Ø 270-320

Distance
[mm]

64

Power supply

AC 220-240V 50/60Hz

**Working
temperature [°C]**

30 ÷ 120

**Product max
capacity [Kg]**

18

**Total input
[kW]**

3,45 (230V)

**Amps.
[A]**

15 (230V)

**Water pressure
[kPa]**

150 ÷ 500

**Net weight
[Kg]**

95



- A Regeneration temperature C°
- B Regeneration by time or core probe
- C Holding temperature or Automatic Holding cycle
- D Humidity set
- E Programs
- F Increase value
- G Start/Stop or Preheating cycle
- H Decrease value
- I Information panel
- On/Off switch located on the right side of the control panel

MODULINE-