



## RRFC20E

### Refrigerated and regeneration floor cabinet (combined)

#### CONSTRUCTION FEATURES

- Tightness chamber with radiused corners
- Internal AISI 304 18/10 stainless steel bumpers for trolley's introduction
- Total thermic insulation with rock or glass wool
- Long lasting front seals made up of food grade of high heat resistance
- Ventilated heating provided by high efficiency protected heating elements
- Ventilated cooling provided by stainless steel evaporator
- Ecological compressor units (R404A)
- Door fitted with three point locking system
- Easy access to facilitate maintenance and repair

#### FUNCTIONAL FEATURES

- Electronic control panel of temperature, time and humidity with LCD touch-screen
- End-of-cycle buzzer
- Simplified, user-friendly control
- Automatic control of the humidity's percentage in the chamber, Climachef system
- Operating temperature: 0°C - 160°C
- Automatic humidity vent
- Chamber can accommodate different sized plate or tray rack transport trolleys
- Chamber with safety thermostat
- Delayed start timer
- Intelligent temperature decrease in the cavity at the end of the regenerating cycle allows a perfect warm holding, only for D and E versions

#### STANDARD SUPPLY

- Climachef

#### OPTIONS & ACCESSORIES

- Core probe with the possibility to register 30 different temperatures and save them in the HACCP report (available only with USB port device)
- Concealed water storage tank
- USB port saving device HACCP
- GN pans cart
- Plates cart
- Cart thermal cover
- Glass door and lighting
- Multipoint core probe
- Speedgrade fan speed reduction system
- External hand shower

**MODULINESRL**



# moduline

**Overall dimensions**  
(W x D x H) - mm

1150 x 830 x 2270

**Oven interior**  
(W x D x H) - mm

780 x 695 x 1860

**Trays capacity**

20 x GN 1/1

**Plates capacity**  
Plates Ø 230-310

80

**Power kW**

13,5

**Power supply**

3N AC 400V 50Hz

**Rated voltage**  
[Vac]

3N - 400V

**Total input [kW]**

13,6

**Amps. [A]**


19,6

**Connecting wire**  
min. section (type  
H07 RN-F) [mm<sup>2</sup>]

5 x 2,5

**Water pressure**  
[kPa]

150 ÷ 500

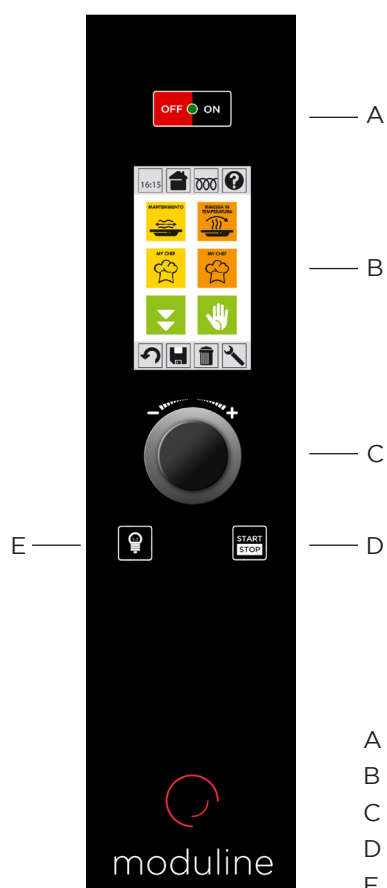

- A ON/OFF switch
- B Display
- C Setting knob and select "Enter"
- D START/STOP key
- E Chamber light button

**MODULINESRL**

Via dell'Industria 11, Z.I. San Giacomo di Veglia 31029 Vittorio Veneto (TV) - ITALY  
tel. +39 0438 5063 - fax +39 0438 912 323 - info@moduline.it - www.moduline.it